

## WARNING


(To reduce the risk of fire, electric shock, or injury to persons):


1. We suggest installation by a licensed electrician.
2. Please read the instruction carefully and save it as you may need it at later time.
3. Before you start, NEVER attempt any work without shutting off the electricity until the work is done. A). Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the "OFF" position. B) Place the wall switch in the "OFF" position.
4. Mounting surface should be clean, dry, flat, strong enough and 1/4" larger than the canopy on all side. Any gaps between the mounting surface and canopy exceeding 3/16" should be corrected as required.
5. Make sure that the ceiling or wall can bear the weight of the lamp before fixture.
6. Make sure the voltage you are using is 120V. The maximum wattage is 60W per bulb.
7. Keep the lamp away from acidic objects in case of damaging the surface of the lamp.
8. When replacing bulb, you should turn off or unplug the lamp and you must wait until it is cool as bulbs get hot quickly.
9. The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur.

It must be understood that common sense, caution and care must be used with any electrical products.


10. Do not touch the bulb or lamp shade during the lighting fixture working.

Image for finished product:

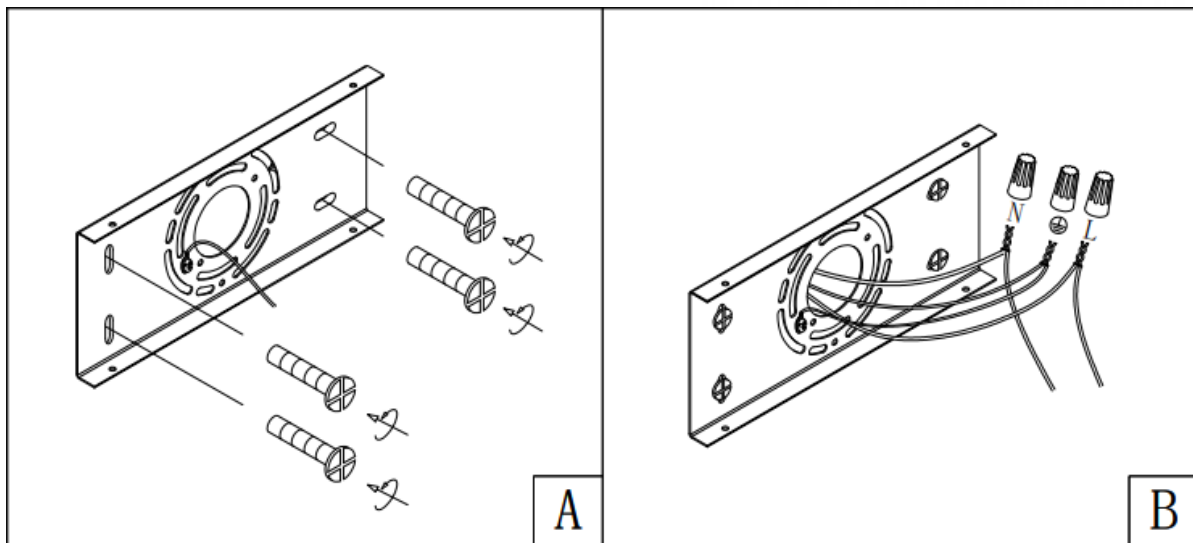

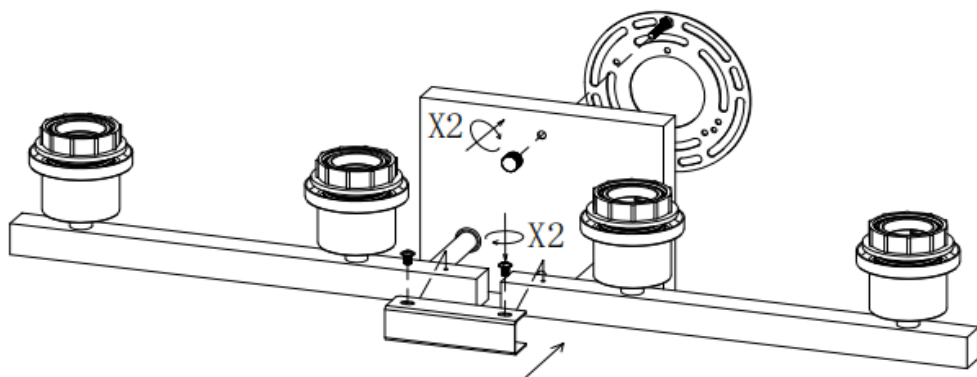

C

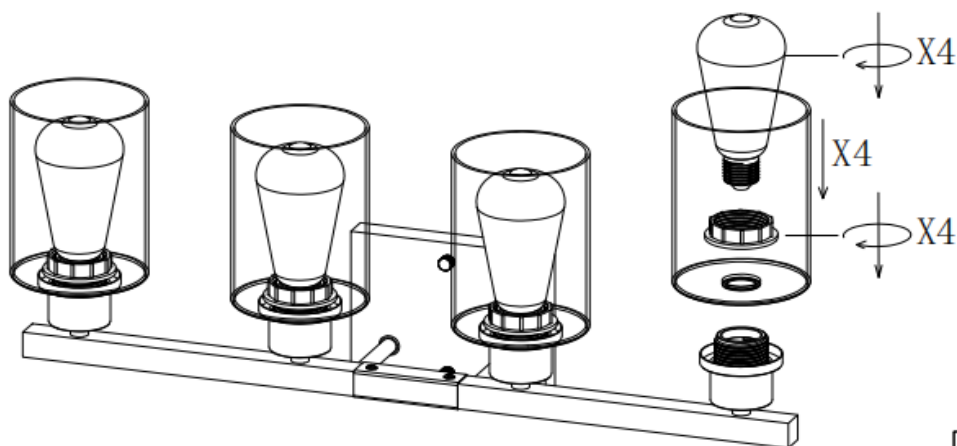

D

1. The lamp body is spliced together by iron pieces.
- 2 Install the lamp body on the base plate
3. Lock the mounting bracket on the junction box.
4. Connect with wire (L), zero wire (N) and ground wire (E) connected to the junction box.
4. Use the nut branch to fix the lamp body on the mounting bracket.
5. Use the lamp ring to fix the glass shade on the lamp fixture.
6. Install the E26 light bulb.