

# INSTALLATION INSTRUCTION FOR FIXTURE #4651-579

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## MOUNTING THE FIXTURE (FIG. 1)

1. Shut off the power supply at the fuse box or circuit breaker. If necessary, remove the old fixture from wall. Including the mounting hardware.
2. Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.
3. Attach the mounting plate (A) to the outlet box using the outlet box screws (C) (SIZE: #8-32N \* L0.5"). The side of the mounting plate (A) marked "GND" must face out.

## CONNECTING THE WIRES (FIG. 2)

4. At this point, connect the electrical wires as shown in Fig. 2, making sure that all wire nuts are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the crossbar using the green screw provided.
5. Tuck the wire connections neatly into the wall outlet box.

## ASSEMBLE THE FIXTURE (FIG. 1)

6. Attach the fixture body onto the outlet box by protruding mounting screws (B) through mounting holes on the backplate (D) and secure with finial (G).
7. Install the T8 bulb (H) (bulb included) into the socket (F).


**(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**

8. Insert the glass shade (I) into the cup (E) and twist the glass shade (I) to secure.

*1x60W Type TB*  
 Your installation is now complete. Return power to the junction box and test the fixture.

**Fig.1**

Set A-020  
 Mounting plate  
 Ground Screw  
 Mounting Screw (2)

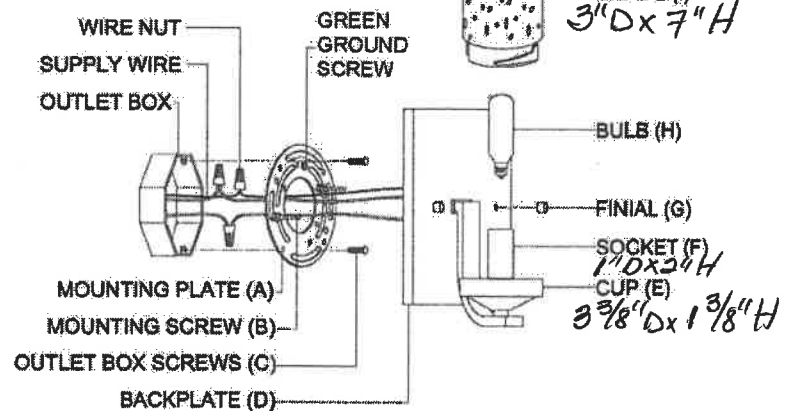

**Fig.2**

|                                                                                                                            |                                                                                                                              |                                                                                                                                                  |
|----------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| FIXTURE WIRES<br>BLACK OR<br>SMOOTH<br> | FIXTURE WIRES<br>WHITE OR<br>RIBBED<br> | FIXTURE WIRES<br>GREEN OR<br>BARE<br>COPPER<br>(GROUND)<br> |
| HOUSE WIRES<br>BLACK<br>(HOT)                                                                                              | HOUSE WIRES<br>WHITE<br>(NEUTRAL)                                                                                            | HOUSE WIRES<br>GREEN OR BARE<br>COPPER<br>(GROUND)                                                                                               |

*Box, 12.20" x 8.26" x 6.88"*

*N.W. 0.81 Kgs.*

*G.W. 1.17 Kgs.*



# INSTALLATION INSTRUCTION FOR FIXTURE #4651-579

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## MOUNTING THE FIXTURE (FIG. 1)

1. Shut off the power supply at the fuse box or circuit breaker. If necessary, remove the old fixture from wall. Including the mounting hardware.
2. Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.
3. Attach the mounting plate (A) to the outlet box using the outlet box screws (C) (SIZE: #8-32N \* L0.5"). The side of the mounting plate (A) marked "GND" must face out.

## CONNECTING THE WIRES (FIG. 2)

4. At this point, connect the electrical wires as shown in Fig. 2, making sure that all wire nuts are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the crossbar using the green screw provided.
5. Tuck the wire connections neatly into the wall outlet box.


## ASSEMBLE THE FIXTURE (FIG. 1)

6. Attach the fixture body onto the outlet box by protruding mounting screws (B) through mounting holes on the backplate (D) and secure with finial (G).
7. Install the T8 bulb (H) (bulb included) into the socket (F).  
**(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**

8. Insert the glass shade (I) into the cup (E) and twist the glass shade (I) to secure.

Your installation is now complete. Return power to the junction box and test the fixture.

**Fig.1**

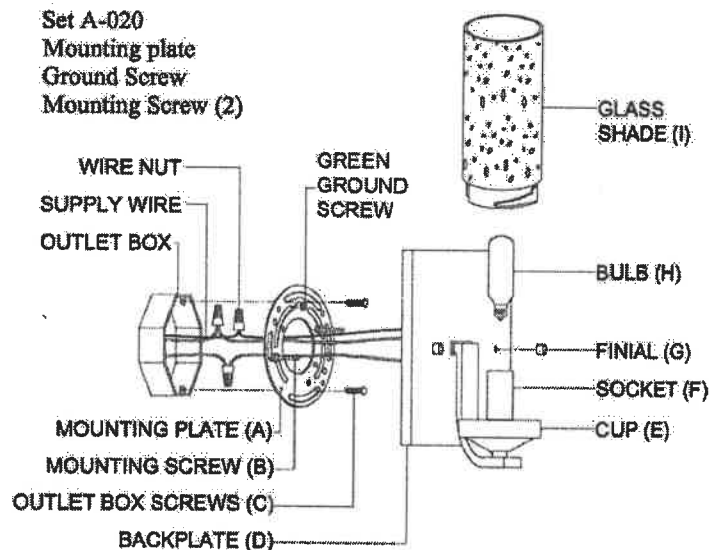

**Fig.2**

