



Sprite Industries, Inc.

The Shower Filter Company

1791 Railroad St, Corona, CA 92880-2511

Phone: 800-327-9137 Fax: 951-735-1016


info@SpriteShowers.com

www.SpriteShowers.com

USE & CARE INSTRUCTIONS

HOSE FILTER

Model HF

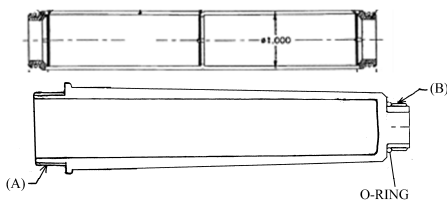

INSTALLATION

1. Screw hose filter to the existing shower bracket .
2. Screw hexagonal end of hose to hose filter and conical end of hose to handle (B).
3. Place handle into bracket.
4. Do not use with a shut-off valve.

OPERATION

BEFORE ENTERING THE SHOWER

1. Activate filter by running hot water through the shower system.
2. COOL TO DESIRED TEMPERATURE BEFORE ENTERING SHOWER.
3. Replace the filter cartridge (model HHC) every 5,000 gallons or 3 months, whichever comes first.

MAINTENANCE

1. Reverse filter cartridge periodically to ensure proper filtration performance and water flow.
2. Replace HHC filter cartridge every 5,000 gallons or 3 months, whichever comes first.


FILTER CARTRIDGE REPLACEMENT (HHC) Replace filter cartridge every 5,000 gallons or 3 months, whichever comes first.

1. To open the handle (A): Turn counter-clockwise and pull away from the showerhead.
2. Remove used filter cartridge (turn and pull).
3. Insert cartridge into handle.
4. To close, turn housings together clockwise (A).

RECYCLE FILTER CARTRIDGE



1. Carefully poke a hole in the screen of the filter cartridge and empty contents into garden soil.
2. Place the filter cartridge in with recyclables.

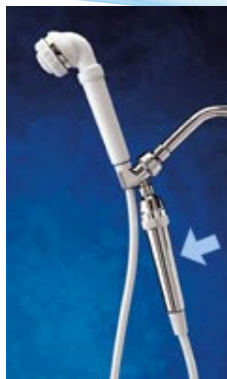

PERFORMANCE DATA (model HHC filter)

Rated Service Flow – 2.5 gallons per minute / 9.5 liters per minute

Rated Service Life for Free Chlorine removal – 5,000 gallons / 11,356 liters or 3 months (whichever comes first)

Maximum Working Pressure – 125 pounds per square inch / 860 kilo pascals.

Maximum Operating Temperature - 120° Fahrenheit / 49° Celsius.

- While testing was performed under laboratory conditions. Actual performance may vary.
- This system is not intended to be used as a drinking water treatment unit.
- Both the system and installation must comply with applicable state and local regulations.

This Sprite Shower Filtration System has been tested for reduction of free chlorine. The concentration of free available chlorine in water entering the system was reduced to a concentration less than or equal to the permissible limit for water leaving the system. This system has not been evaluated for free chlorine reduction in the presence of chloramines. Free chlorine reduction performance may be impacted by the presence of chloramines in the water supply.

Notes on Test Protocol:

Minimum chlorine reduction shall be listed as $\geq 50\%$ free available chlorine (FAC) when used with an influent challenge water of 2mg/L FAC. Average concentrations shall be the arithmetic mean of all reported influent challenge or product water concentrations (the detection limit value shall be used for any non-detectable concentration). The specified average percent reduction shall not be greater than the reduction calculated using the arithmetic means of the influent challenge and the product water concentrations respectively.