WHIRLPOOL BRAND COMMERCIAL WASHERS



DIRECT DRIVE SYSTEM

27" heavy-duty commercial washers feature the Direct-Drive, No-Belt washing system for

greater reliability, reduced down time and increased profits.

LARGE CAPACITY WASH BASKET

Ideal for handling family size loads!

POWDERED PAINT FINISH

Powdered paint top, lid and cabinet finish to resist chipping and scratching.



HIGH AND LOW WATER LEVEL

Reduce water consumption to 25.22 gallons per cycle!*

*Based on low water level, 3 lb. load



TRIPOD SUSPENSION

Sturdy tripod-suspension with active liquid filled balance ring reduces

product weight while balancing commercial size laundry loads.



SEALED HIDDEN LID SWITCH

To help ensure safe operation, Whirlpool®

commercial washers feature a lid switch that is truly hidden. Not only does this prevent tampering, it ensures that the washer will not operate when the lid is open.

ON PREMISE NON METERED COMMERCIAL WASHER

Featuring Mechanical Controls





GCAM2792TQ — 27" 2-Speed On Premise Non Metered Washer

EXCLUSIVE 90 DAY FACTORY LABOR WARRANTY!!

- 3.2 Cu. Ft. Wash Basket, 18 Lbs. UL
- Push Button Controls
- High Efficiency, Low Water Factor
- 8 Cycles: Regular/Super, Regular/Heavy, Regular/ Normal, Regular/Light, Permanent Press/Normal, Permanent Press/Light, Gentle, Extra Rinse
- Two Water Levels
- Bleach and Fabric Softener Dispensers
- Two-Speed Advantage with True Gentle Wash, High Speed Only!
- Deep Rinse System
- Powdered Paint Top and Lid, Stainless Steel Hinges and Plated Console Screws
- High Speed Spin 640 RPM (Approx.)
- Galvanized, Heavy Gauge Cabinet Back, Side and Front Panels, Removable Front Service Panel
- Heavy Duty Motor Coupler Isolator Tested to 20,000 Cycles!*
- 1/2-HP Motor with Built-In Overload Protector: 120-Volt, 60 Hz., A.C. Agitation Speed 180 SPM/ High 120 SPM/Low
- Reliable, Direct-Drive NO-BELTS Drive System, Front and Bottom Serviceable
- Extra Long Power Cord, Water Inlet Hoses with Brass Couplings and Corrugated Drain Hose Included!
- 25.22 Gallons Minimum Water Usage per Cycle (Low Water Level, 3 Lbs. Load)
- 2 Year Limited Parts Only Warranty**
 - * Testing completed 11/12/2001
 - ** Call 1-800-NO-BELTS for warranty details

WARRANTIES

EXCLUSIVE 90 DAY FACTORY LABOR WARRANTY!!


WASHER WARRANTY

2-Year Limited (parts only)


For important information regarding warranty inclusions, exclusions and limitations, please call 1-800-NO-BELTS

Dimensions are for planning purposes only. For complete information, see installation instructions packed with product.

NEW YORK CITY M.E.A.



WASHER FRONT VIEW

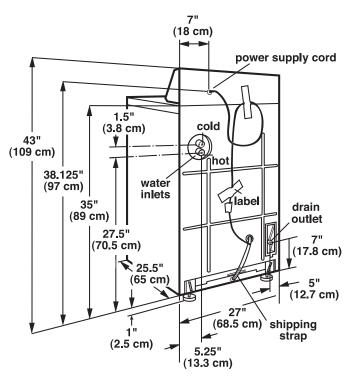

WASHER BACK VIEW

COMMERCIAL WASHER SPECIFICATIONS

WASHER SPECIFICATIONS	
MODEL NUMBER	GCAM2792TQ
GENERAL INFORMATION Stainless steel look push button console, powdered paint finish cabinet, top and lid galvanized, extra thick back panel, reliable dual agitator inlet hoses and corrugated drain hoes included.	8 Cycles: Regular/Super, Regular/ Heavy, Regular/Normal, Regular/ Light, Permanent Press/Normal, Permanent Press/Light, Gentle, Extra Rinse
MOTOR 120-Volt ½-HP Direct-Drive with Built-In Overload Protector	Two-Speed
AGITATION STROKES PER MINUTE/AMPERAGE Maximum Rated Amperage	180 SPM/High (5.0 Amps No Load) 9.8 Amps (120-Volt)
MOTOR RPM	1725 High
SPIN RPM	640 High
ELECTRICAL REQUIREMENTS	120V, 60 Hz., A.C. Standard 15 Amp Breaker/Fuse Branch Circuit for Each Washer (Subject to Local Codes)
DIMENSIONS See Illustrations	43" H (at Metercase Top), 35" H (at Lid), 27" W, 25.5" D
SHIPPING WEIGHT (EST.)	124 Lbs.
BASKET VOLUME	3.2 Cu. Ft.

Energy information is available online at www.whirlpoolcommercial laundry.com/products, WP literature part #CWXL077B